WALLDISP
Product data sheet

WALLDISP BENEFITS:

› Reliable, simple and light-weighted
› Quick and easy assembly in less than 5 minutes
› Shape changing banner for displaying 1 to 3 graphic panels thanks to a single carry bag.
› Invisible link between the panels to form a display of 3 m (118 in.).
› Conversion from a straight to a curved display or vice versa within seconds.
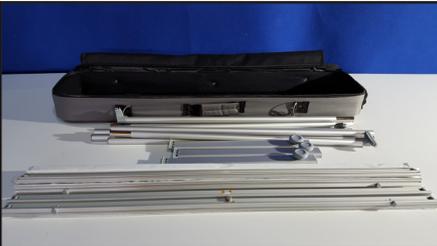› Sold with a transportation bag: for protection and effortless carrying of the supports and graphics.

HEXIS PRODUCTS RECOMMENDED FOR THE PRINTING:

› POPNC400   › POP200ECOS
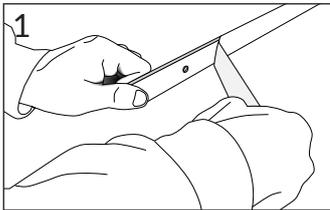› POP310ECOS   › POPPRIMO

GRAPHIC DIMENSIONS FOR PRINTING:

› Width: 85 cm (33.46 in.)
› Height: 200 cm (78.74 in.)
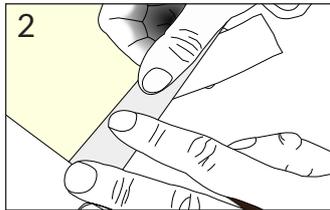
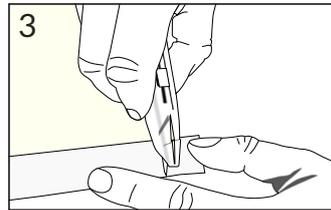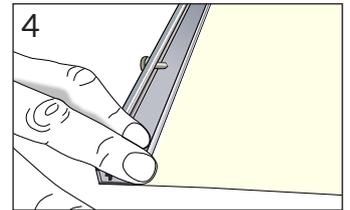|	
	The bag contains: 3 bottom attachment rails with adjustable feet 3 top attachment rails 3 foldable supporting rods 3 bases for foldable supporting rods 2 rolls of self-adhesive magnetic tapes
Bag dimensions: 950x100x240 mm (37.40x3.94x9.45 in.)	
height x depth x width	
Total weight (without graphics): 7.5 kg (16.53 lb.)	

HEXIS®

WALLDISP
Assembly

1

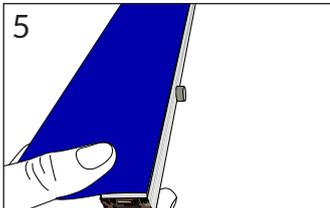Remove the hook and loop tape from one of the attachment rails.

2

Remove the protective liner, then position and apply the adhesive side of the hook and loop tape on the back and egde of the graphic.

3

If necessary, cut the excess tape as close as possible to the graphic with a cutter.
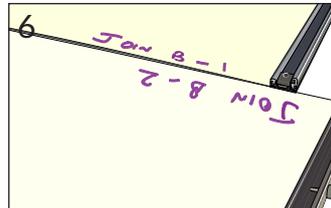
4

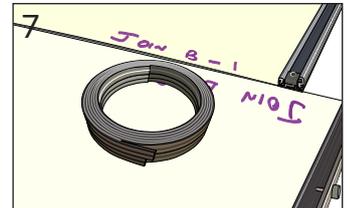Adjust and position the attachment rail on the graphic.

5

Firmly apply the graphic to the rail.

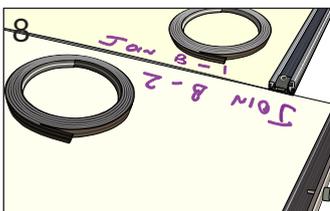Repeat steps 1 to 5 for each rail and graphic.

3 hook and loop tapes are available in the «WALLSPARE» kit for any use of the support with a new graphic.
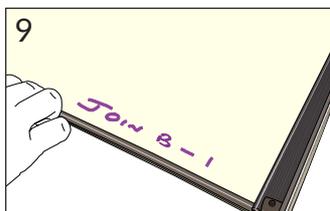
6

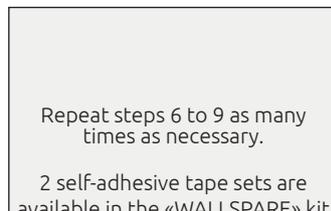For displaying multiple panels, identify and pair up the edges of each graphic that will be in contact.

7

Separate the 2 edge-to-edge, self-adhesive magnetic tapes.

8

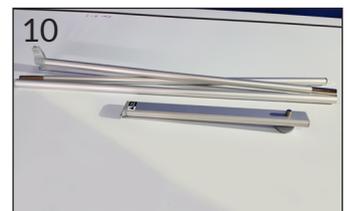Place a magnetic tape on B-1 and the other one on B-2.

9

Remove the protective liner, then apply each self-adhesive magnetic tape as close as possible to the edge of the graphic.
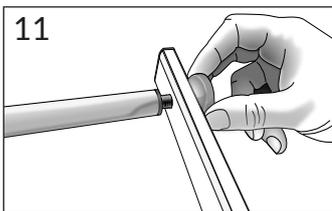
Repeat steps 6 to 9 as many times as necessary.

2 self-adhesive tape sets are available in the «WALLSPARE» kit for any use of the support with a new graphic.
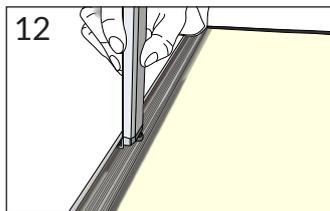
10

The feet include a foldable supporting rod and a screwable base.

www.**hexis-graphics**.com

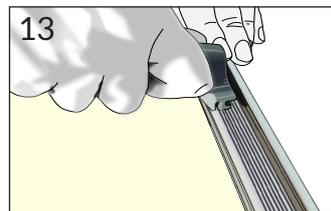**HEXIS**®

WALLDISP
Assembly

11

Unfold the supporting rod and assembly it with the base using the screw located on the base.
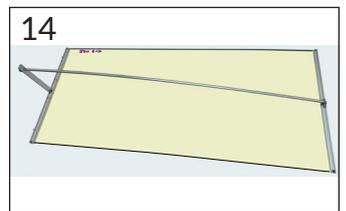
12

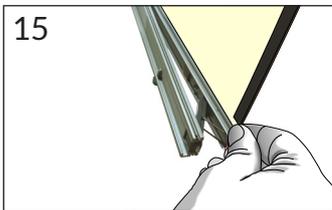Insert the end of the base into the location indicated in the notch of the bottom rail.

13

At the indicated location, insert the hook in the top rail by firmly pressing the upper part of the bar.
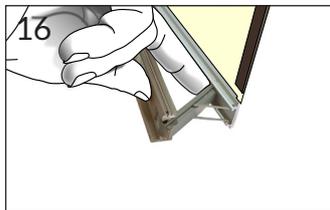
14

The retaining foot is now assembled to the graphic.

Repeat steps 11 to 13 for each support.

15

For displaying a curved graphic panel:

Open the rail while pushing the graphic backwards.

16

Set the wedge to its maximum position to keep the rail open.

17

The rail is locked in the open position.

Repeat steps 15 to 16 for each side of the bottom and top rails that must be opened.

The panels can be placed side by side.

Single panel

Rear view of 2 linked panels

Straight display with 3 panels

Curved display with 3 panels

HEXIS®