



## TECHNICAL DATA SHEET – CUTTING FILAMENT BODYLINE

BODYLINE can be used to cut paint protection films, from simple to very complex shapes and contours.


Knifeless cutting tool composed of a thin metallic filament coupled together with a polymeric film and an adhesive-coated, transparent TPU film.

### PRODUCT FEATURES:

#### Indicative value

- Width (mm): 5

### USER'S INSTRUCTIONS:

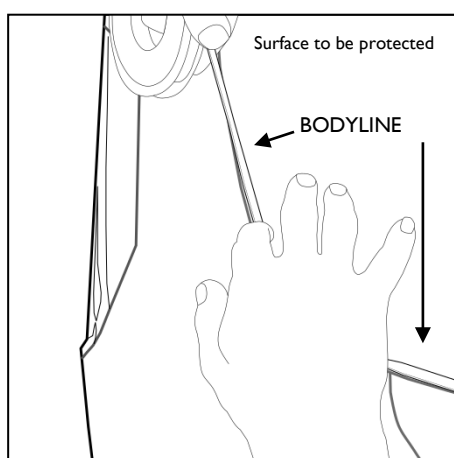


- Lay BODYLINE on the clean and dry substrate surface in order to describe the contour or pattern you want to cut.


- Firmly apply BODYLINE to the substrate.

*Make sure you keep an overlap of around 15 cm (5.91 in.) beyond the edge of the surface to be covered in order to easily grip the filament.*


- Cut BODYLINE using scissors or a cutter.

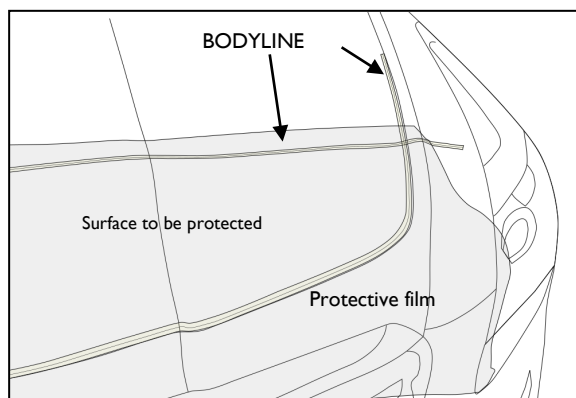


- Apply the paint protection film to be cut to the substrate, following the adequate installation method (please refer to the documentation specific to the applied films). Leave additional material to overhang beyond the cutting filament. Make sure to prevent covering the filament segment that serves for gripping.

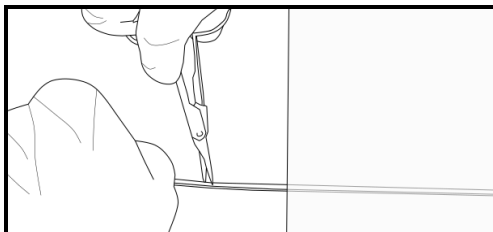

- Using scissors or a cutter, cut the BODYLINE TPU film about 10 cm (3.94 in.) from the edge of the protective film to be cut.

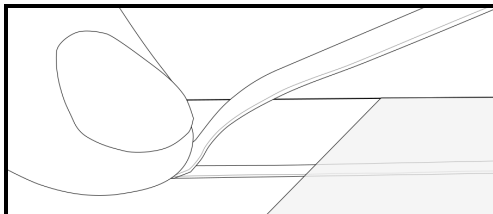

- Fold back the BODYLINE piece.
- Press a finger firmly on the fold.
- Sharply pull on the free end to release the cutting filament.

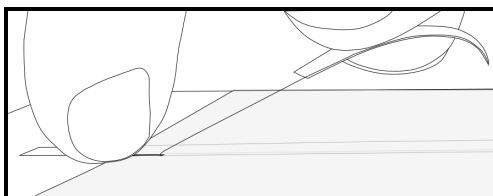

- Pull the metallic thread to the edge of the protective film to be cut.
- Press a finger on the edge of the protective film to be cut in order to carry out a precise cut.
- Sharply pull on the filament to start cutting. Then, carefully and continuously, pull on it until completion of the film cutting.

- Remove the excess car body protection film and the residual BODYLINE tape immediately after cutting while generously moistening the formed cut.
- To finish, firmly squeegee the protection film edges.
- **Handle with care: risk of serious injury if BODYLINE is wrapped around the finger or hand when starting the cutting procedure, and during cutting as well.**

## **STORAGE:**

- Shelf life (before application):  
The shelf life of this film is 2 years when stored in its unopened original packaging at a temperature of 21 °C (70 °F) with a relative humidity of 50 %.

## **NOTES:**

Due to the great variety of substrates and the growing number of new applications, the installer must check the suitability of the medium for each application. All of the published information is based on measurements regularly performed in the laboratory. The published information does not however constitute a binding guarantee. The seller cannot be held liable for indirectly related damages and assumes no liability for claims that are higher than the replacement value of the purchased product. All specifications are subject to potential changes without prior notice. Our specifications are automatically updated on our website [www.hexis-graphics.com](http://www.hexis-graphics.com).